

Unit: mm (in)

ø: Inner diameter

Distance Model		H	J	K
M/T	2WD	514.5 (20.26)	2.5 (0.10)	267.5 (10.53)
	4WD	550 (21.7)	10.5 (0.413)	295 (11.6)
A/T	VTEC	501.5 (19.74)	25 (0.98)	305.5 (12.03)
	Except VTEC	493 (19.4)	-2 (-0.08)	305 (12.0)

Model Distance	3D	4D
①	2100 (82.7)	2150 (84.6)
②	2632 (103.6)	2682 (105.6)
③	2611 (102.8)	2661 (104.8)
④	2607 (102.6)	2657 (104.6)
⑤		536 (21.1)
⑥		906 (35.5)
⑦		203 (7.99)


Technical drawing of a vehicle chassis showing various points (a, b, c, d, e, f, g, h, i, k, m, n, o) and dimensions. The drawing includes a center line, base line, and vertical line. Dimensions are given in mm (in).

Key dimensions and points:

- POINT a: 102 (4.0)
- POINT b: 302 (11.9)
- POINT c: 271 (10.7)
- POINT d: 102 (4.0)
- POINT e: 500 (19.7)
- POINT f: 108 (4.3)
- POINT g: 151 (5.9)
- POINT h: 151 (5.9)
- POINT i: 151 (5.9)
- POINT k: 151 (5.9)
- POINT m: 151 (5.9)
- POINT n: 151 (5.9)
- POINT o: 151 (5.9)

Key dimensions:

- 1000 (39.4)
- 1188 (46.8)
- 932 (36.7)
- 869 (34.2)
- 765 (30.1)
- 487 (19.2)
- 108 (4.3)
- 218 (8.6)
- 68 (2.7)
- 13 (0.5)
- 174 (6.9)
- 102 (4.0)
- 265 (10.4)
- 350 (13.8)
- 32 (1.25)
- 550 (21.7)
- 800 (31.5)
- 1365 (53.7)
- 830 (32.7)
- 870 (34.3)
- 374 (14.7)
- 46 (1.8)
- 151 (5.9)
- 46 (1.8)
- 13 (0.5)
- 174 (6.9)
- 102 (4.0)
- 265 (10.4)
- 350 (13.8)
- 32 (1.25)
- 550 (21.7)
- 800 (31.5)
- 1365 (53.7)
- 830 (32.7)
- 870 (34.3)
- 374 (14.7)
- 46 (1.8)
- 151 (5.9)
- 46 (1.8)
- 13 (0.5)
- 174 (6.9)
- 102 (4.0)
- 265 (10.4)
- 350 (13.8)
- 32 (1.25)
- 550 (21.7)
- 800 (31.5)
- 1365 (53.7)
- 830 (32.7)
- 870 (34.3)
- 374 (14.7)
- 46 (1.8)
- 151 (5.9)
- 46 (1.8)
- 13 (0.5)
- 174 (6.9)
- 102 (4.0)
- 265 (10.4)
- 350 (13.8)
- 32 (1.25)
- 550 (21.7)
- 800 (31.5)
- 1365 (53.7)
- 830 (32.7)
- 870 (34.3)
- 374 (14.7)
- 46 (1.8)
- 151 (5.9)
- 46 (1.8)
- 13 (0.5)
- 174 (6.9)
- 102 (4.0)
- 265 (10.4)
- 350 (13.8)
- 32 (1.25)
- 550 (21.7)
- 800 (31.5)
- 1365 (53.7)
- 830 (32.7)
- 870 (34.3)
- 374 (14.7)
- 46 (1.8)
- 151 (5.9)
- 46 (1.8)
- 13 (0.5)
- 174 (6.9)
- 102 (4.0)
- 265 (10.4)
- 350 (13.8)
- 32 (1.25)
- 550 (21.7)
- 800 (31.5)
- 1365 (53.7)
- 830 (32.7)
- 870 (34.3)
- 374 (14.7)
- 46 (1.8)
- 151 (5.9)
- 46 (1.8)
- 13 (0.5)
- 174 (6.9)
- 102 (4.0)
- 265 (10.4)
- 350 (13.8)
- 32 (1.25)
- 550 (21.7)
- 800 (31.5)
- 1365 (53.7)
- 830 (32.7)
- 870 (34.3)
- 374 (14.7)
- 46 (1.8)
- 151 (5.9)
- 46 (1.8)
- 13 (0.5)
- 174 (6.9)
- 102 (4.0)
- 265 (10.4)
- 350 (13.8)
- 32 (1.25)
- 550 (21.7)
- 800 (31.5)
- 1365 (53.7)
- 830 (32.7)
- 870 (34.3)
- 374 (14.7)
- 46 (1.8)
- 151 (5.9)
- 46 (1.8)
- 13 (0.5)
- 174 (6.9)
- 102 (4.0)
- 265 (10.4)
- 350 (13.8)
- 32 (1.25)
- 550 (21.7)
- 800 (31.5)
- 1365 (53.7)
- 830 (32.7)
- 870 (34.3)
- 374 (14.7)
- 46 (1.8)
- 151 (5.9)
- 46 (1.8)
- 13 (0.5)
- 174 (6.9)
- 102 (4.0)
- 265 (10.4)
- 350 (13.8)
- 32 (1.25)
- 550 (21.7)
- 800 (31.5)
- 1365 (53.7)
- 830 (32.7)
- 870 (34.3)
- 374 (14.7)
- 46 (1.8)
- 151 (5.9)
- 46 (1.8)
- 13 (0.5)
- 174 (6.9)
- 102 (4.0)
- 265 (10.4)
- 350 (13.8)
- 32 (1.25)
- 550 (21.7)
- 800 (31.5)
- 1365 (53.7)
- 830 (32.7)
- 870 (34.3)
- 374 (14.7)
- 46 (1.8)
- 151 (5.9)
- 46 (1.8)
- 13 (0.5)
- 174 (6.9)
- 102 (4.0)
- 265 (10.4)
- 350 (13.8)
- 32 (1.25)
- 550 (21.7)
- 800 (31.5)
- 1365 (53.7)
- 830 (32.7)
- 870 (34.3)
- 374 (14.7)
- 46 (1.8)
- 151 (5.9)
- 46 (1.8)
- 13 (0.5)
- 174 (6.9)
- 102 (4.0)
- 265 (10.4)
- 350 (13.8)
- 32 (1.25)
- 550 (21.7)
- 800 (31.5)
- 1365 (53.7)
- 830 (32.7)
- 870 (34.3)
- 374 (14.7)
- 46 (1.8)
- 151 (5.9)
- 46 (1.8)
- 13 (0.5)
- 174 (6.9)
- 102 (4.0)
- 265 (10.4)
- 350 (13.8)
- 32 (1.25)
- 550 (21.7)
- 800 (31.5)
- 1365 (53.7)
- 830 (32.7)
- 870 (34.3)
- 374 (14.7)
- 46 (1.8)

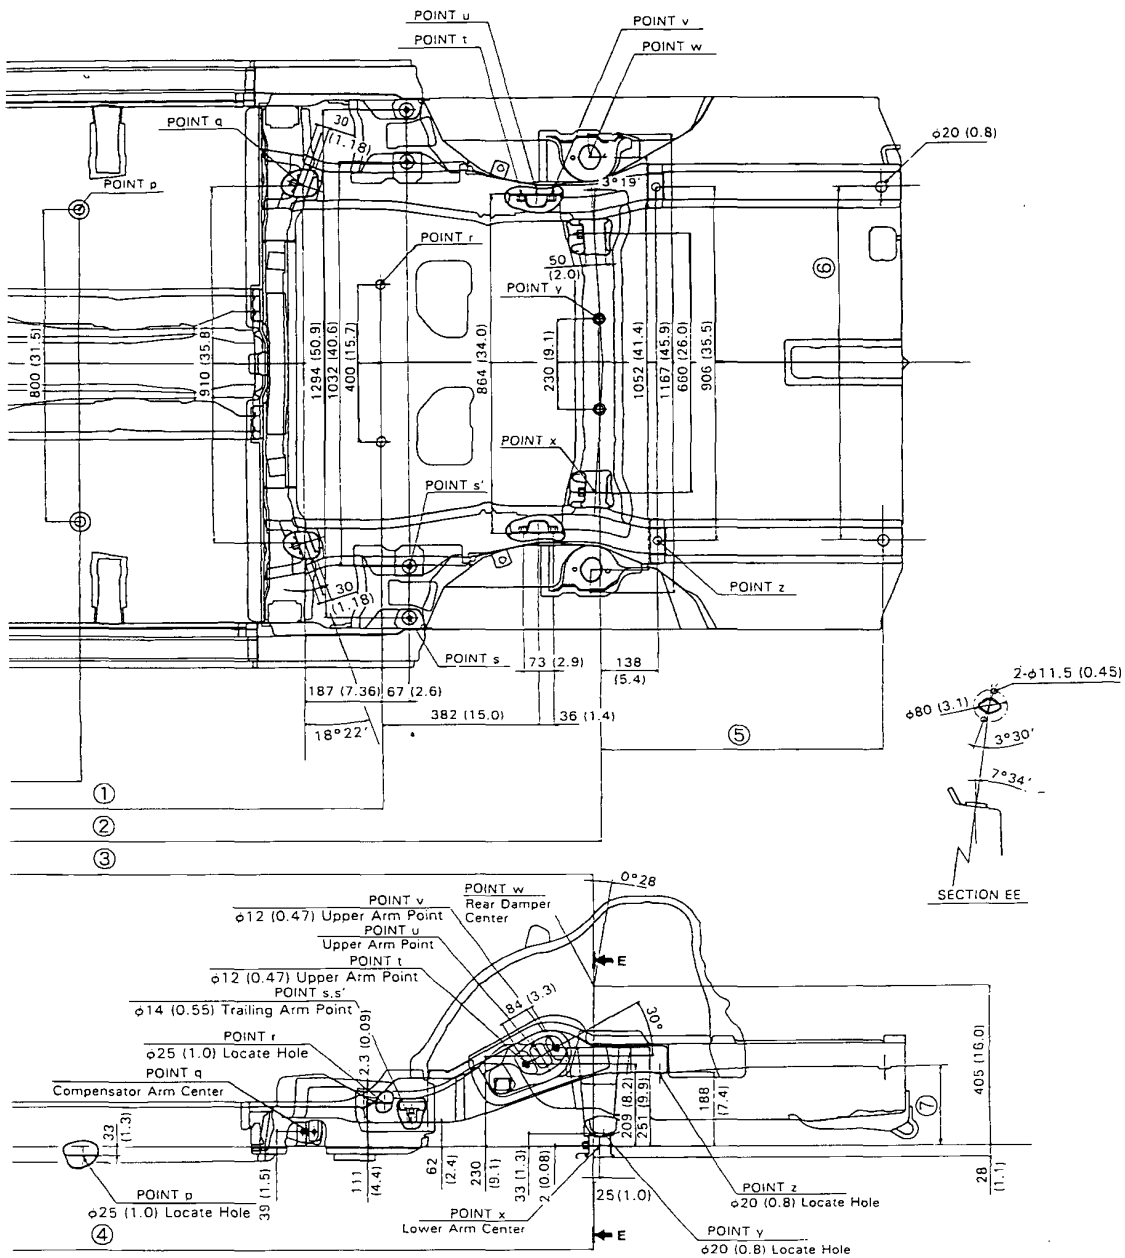

(cont'd)

Frame Repair Chart

(cont'd)

4WD:

NOTE:

The distance of the engine compartment is described the table on page 20-12.

Unit: mm (in)

Ø: Inner diameter

